

# Noble Sam Turner

## General


Rig Type:	Jackup
Rig Design:	Friede & Goldman JU3000N
Builder:	Jurong Shipyard
Year Built / Upgraded:	2014
Classification:	ABS +A1, Self Elevating Drilling Unit
Flag:	Liberia
MODU Code:	2009

## Ratings & Dimensions

Water Depth:	400 ft
Drilling Depth:	35,000 ft
Length:	231 ft
Breadth:	277 ft
Depth:	31 ft
Leg Length:	489 ft
Leg Spacing:	150 ft / 156 ft
Draft (Operating/ Transit):	27 ft / --
Cantilever Envelope:	75 ft x 30 ft; 3,000 kips
Variable Deck Load:	14,300 kips
Hook Load:	2,500 kips
Setback Capacity:	1,675 kips
Quarters Capacity:	150

## Capacities

Fuel:	5,185 bbls
Drill Water:	11,255 bbls
Liquid Mud:	7,847 bbls
Brine Storage:	2,213 bbls
Base Oil Storage:	2,213 bbls
Bulk Storage:	18,000 cu ft
Sack Storage:	5,000 sacks

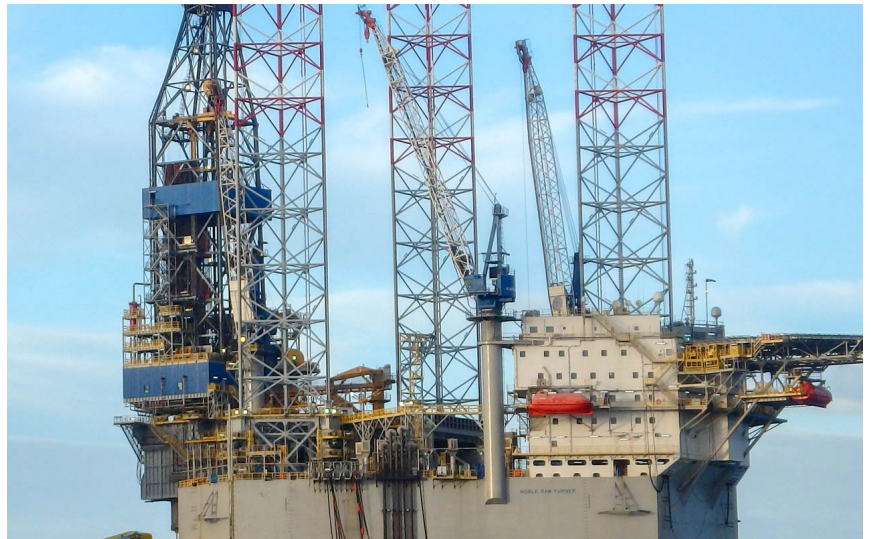

## Equipment

Derrick:	NOV Bolted Single Static Bottleneck; 210 ft x 40 ft x 45 ft; 2,500 kips
Racking Capacity:	Pipe capacity, @ 102 ft DP finger board, 266 Stds 6 5/8 DP. Casing Capacity @ 102 ft CSG finger board, 24 Stds 13-3/8 in, or 72 Stds 9-5/8 in, 7-5/8 in or 7 in
Drawworks:	NOV - SSGD-1250-6900-100-10.5
Top Drive:	NOV TDX-1000; 91,500 ft-lbs @ 116 RPM fts, 35,270 ft-lbs @ 250 RPM fts
Rotary:	NOV - RST-495; 49-1/2 in
Iron Roughneck:	NOV ST-160; 140,000 / 160,000 ft-lbs. m/u / - b/o torque
BOP:	Cameron TL; 4 ram; 18-3/4 in x 15k psi w/ Shaffer 18-3/4 in x 10k psi annular
LMRP:	N/A
Control System:	Cameron
Pipe Handling System:	NOV Vertical column Racker PRS-6is
Solids Control System:	(5) Thule shakers/Mud cleaner/Desander
Diverter:	GE Vetco KFDJ; 1,000 psi
Cranes:	(3) NOV - OC3000LCE 75 T, (1) PC1891KCE Knuckle boom 5.5 T
Mud Pumps:	(3) National 14-P-220; 2,200 HP
Engines:	(5) Caterpillar C-175-16
Jacking System:	Friede & Goldman VFD-850. 18 pinions per leg.



Noble Corporation plc  
10 Brook Street  
London, W1S 1BG  
www.noblecorp.com

These specifications are intended for informational purposes only. Noble makes no warranties about the accuracy or completeness of any information contained herein.